

Minitype 8-bit Digital 1-ch Video with 1 Bi-directional Data



The FTD110DBM series offer a value-based solution for digital quality point-to-point transmission. It supports optical transmission of 8-bit PCM coded video and one bi-directional data through one multimode or singlemode optical fiber.


Transmitters of the FTD110DBM series are also compatible with receivers of the FTD110DB and FTD110DB-XXR3 series, catering to different system configurations.

8-bit Digital Video

Features

- Non-compressed 8-bit digital video transmission
- No video degradation over max. operating distance
- Signal to noise ratio better than 60 dB
- Supports NTSC, PAL & SECAM video systems
- Gold plated BNC connector
- Supports bi-directional data
- Supports multi-protocol data in RS232, RS422 & RS485(2 or 4-wire) Tri-state formats
- External access for data format selection via DIP switches
- Laser diode for optical transmission
- Optimum sensitivity for power budget concerns
- Excellent suppression of EMI & RFI and elimination of ground loop
- Adjustment and maintenance free
- No setup just plug-and-play
- Transient voltage protection on power supply and all signal inputs & outputs
- Robust design for harsh environment applications
- Cost effective solution for small scale systems
- Transmitters of the FTD110DBM series are also compatible with receivers of the FTD110DB and FTD110DB-XXR3 series

Typical Application

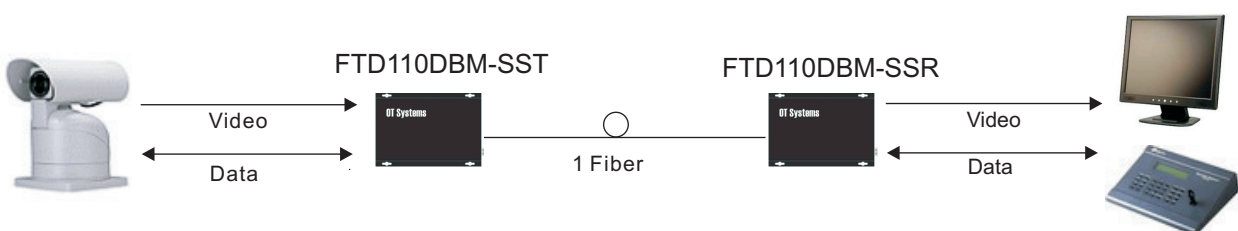

FTD110DBM Series

Ordering Information

Model	Description	No. of Fibers (Wavelengths)	Optical Power Budget	Max. Distance
MULTIMODE (62.5/125 um)				
FTD110DBM-SMT	Minitype 1 Video Transmitter/1 Data Transceiver	1 (1310/1550 nm)	23 dB	4 km
FTD110DBM-SMR	Minitype 1 Video Receiver/1 Data Transceiver			
SINGLEMODE (9/125 um)				
FTD110DBM-SST	Minitype 1 Video Transmitter/1 Data Transceiver	1 (1310/1550 nm)	17 dB	40 km
FTD110DBM-SSR	Minitype 1 Video Receiver/1 Data Transceiver			
FTD110DBM-SSTL	Minitype 1 Video Transmitter/1 Data Transceiver	1 (1310/1550 nm)	24 dB	60 km
FTD110DBM-SSRL	Minitype 1 Video Receiver/1 Data Transceiver			
Compatibility:	FTD110DBM-SMT also with FTD110DB-SMR & FTD110DB-SMR3 FTD110DBM-SST also with FTD110DB-SSR & FTD110DB-SSR3 FTD110DBM-SSTL also with FTD110DB-SSRL & FTD110DB-SSR3L			
Accessories:	FT-PA/12V. 12VDC power adaptor included (US, European, UK or Australian power plug)			
Options:	ST type connector is standard. For FC type, specify 'F' in the model number. Eg. FTD110DBM-FMT Audio or contact closure is available as an alternative to data. Please consult factory for details			

8-bit Digital Video

- NOTES: (1) Transmission distance will suffer if additional losses are introduced by the optical connectors, fusions, splices and the fibers within the network.
 (2) Operating distance of multimode is limited by the characteristics of the fiber bandwidth.
 (3) Power adaptor is manufactured by third party and is supplied with fitted screw-terminal output cables.
 (4) Please feel free to consult factory for any special requirement and customization

Specifications

Video		Connectors	
No. of Channels:	1	Optical:	ST (standard), FC
Bandwidth:	6.5MHz	Video:	BNC
Format:	PAL / NTSC / SECAM	Data:	7-pin screw terminal
Input / Output:	1.0 Vp-p, 75 ohms	Power:	2-pin screw terminal
Differential Gain:	< 1% typical	Electrical and Mechanical	
Differential Phase:	< 1° typical	Power:	12VDC @ 3W
Signal-to-Noise Ratio:	> 60dB	Dimensions (HxWxD):	30.5 x 111.0 x 146.5mm
Data		Weight:	0.35kg
No. of Channels:	1	LED Indicators:	Power, Video, Optical carrier detected, Data Tx & Data Rx
Data Direction:	Bi-directional	Environmental	
Data Interface:	DIP switch-selectable RS232, RS422, RS485(2 or 4-wire) Tri-state	Operating Temp.:	-40°C to +75°C
Data Format:	MPD (Manchester, Bi-phase, etc)	Storage Temp.:	-40°C to +85°C
Data Rate:	0~256Kbps	Relative Humidity:	0 to 95% non-condensing
		MTBF:	> 100,000 hours



Lifetime Warranty